

Make-up Mirror Stands

Materials Needed


- 5 - Cleat Sockets
- 4 - Two Way Hinges
- 1 - 4x8 Sheet of 3/4" Plywood
- 1 - 1x4x6 Stick of Lumber
- 1 - Black 14 or 16 Gauge Electrical Wire
- 1 - White 14 or 16 Gauge Electrical Wire
- 2 - Drawer Clasps
- 2 - Handles
- 1 Box of 1-1/8" Screws (for sockets)

Cut List

- A (3/4" Plywood) - 2 @ 15-7/8" x 53"
- B (1x4 Lumber) - 1 @ 53"
- C (3/4" Plywood) - 4 @ 2" x 15-1/8"
- D (3/4" Plywood) - 2 @ 2" x 53"


Additional Details

D (like a RAIL) extends the entire length of **A**. While **C** (like a STILE) is shorter and butts up against **D**. **A** acts as a Skin/ Lid. Hinges are placed between **A** and **B**, 6" from the ends. Handles are placed on the front side of **A**, offset.

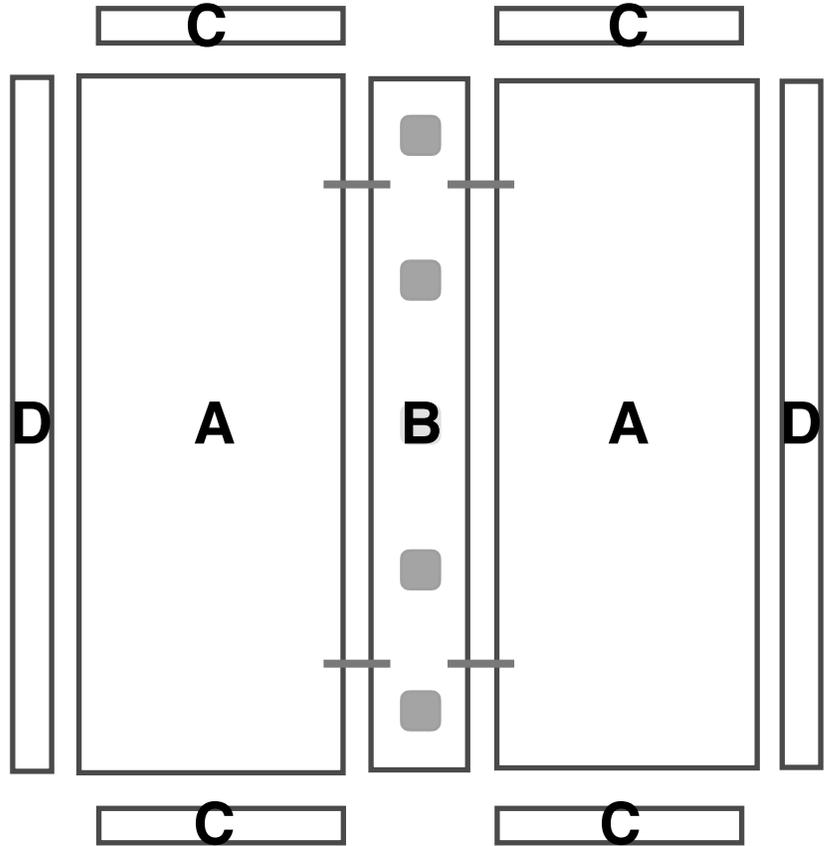

**Safety chains are optional.

Cleat Socket Spacing

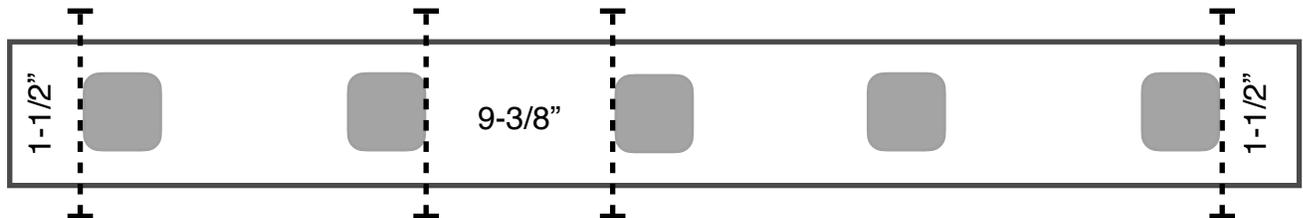

Wiring Details

- ◆ Sockets wired in Parallel.
- ◆ Positive and Negative wires go to an electrical plug.
- ◆ Terminals at the socket are exposed but safe. Hot glue can be applied to protect the terminals.
- ◆ Wires between the sockets can be taped down with Gaff Tape to prevent accidental snagging.

